

CC2080 Series


Dual Wire Coil Cord

Description

The CC2080's polyurethane coil insulation and strain relief molding offers excellent coil memory and endurance. Dual grey and black 4mm sockets help maintain a constant connection. The coil cord come standard in 6' or 12' lengths.

Dual wire wrist straps provide redundancy. When used with resistive loop monitors WB2500 wrist strap sets continuously verify resistance to ground.

Meets or exceeds requirements of ANSI ESD-S20.20 and ESDA Standard 1.1-2006

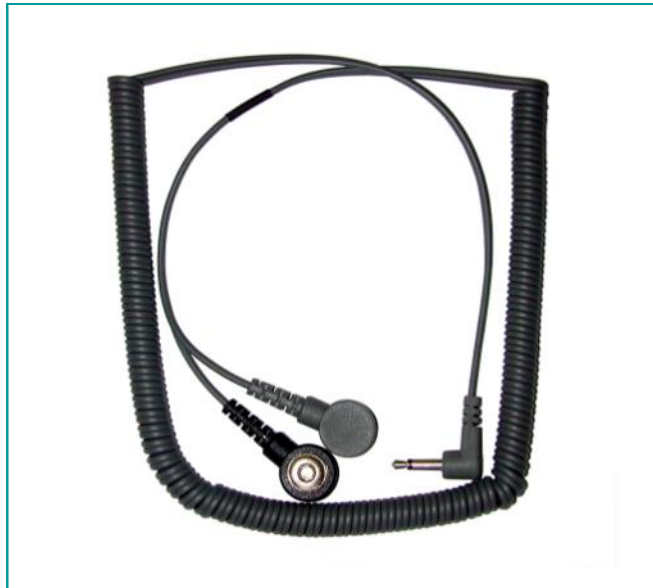

Product Specifications

Coil Cord


Length: 6, 12 feet, extended
Resistor: 1 meg ohm
Flex Life: > 20,000 flexes
Color: Grey, black
Banana: 3.5mm phono plug*

*Compatibility with particular resistance monitors should be verified.

Product Numbers

<u>Item Number</u>	<u>Description</u>
WB2580	Set, Dual band, 6' cord, 4mm, 1meg
WB2585	Set, Dual band, 12' cord, 4mm, 1meg
WB0025	Adjustable dual fabric band, 4mm
CC2080	6' dual coil cord, grey, 4mm
CC2085	12' dual coil cord, grey, 4mm

This document is prepared for our customers as a service, and is to the best of our knowledge true and accurate. However, it is understood and agreed by the users of this document that we will accept no liability for the conclusions reached. Users of this document may therefore wish to perform additional testing before determining that products mentioned are suitable.



Transforming Technologies, LLC

3719 King Road.
Toledo, OH 43617

Phone: 1.419.841.9552
Fax: 1.419.841.3241
www.transforming-technologies.com

Outstanding Alternatives in Static Control